

ArmorZone™ Portable Water Filled Barrier

PHYSICAL SPECIFICATIONS

Module Length 2.14 m [7] Width 450 mm [17""] Height 870 mm [34"] Module Weight Empty 50 kg [132 lb.] Module Weight Full 610 kg [1345 lb.] Test Performance Level NCHRP 350 TL-2



FREQUENTLY ASKED QUESTIONS

HOW MUCH WATER IS REQUIRED TO FILL AN ARMORZONE MODULE?

Each ArmorZone Module requires 148 gallons [560 I] of water. ArmorZone Modules have been designed with extra large "fill" holes to allow for quick deployment

ARE END TREATMENTS AVAILABLE?

Yes the ABSORB 350 Anchorless Crash Cushion can be installed to the ArmorZone Portable Water Filled Barrier if end treatments are needed.


HOW MANY ARMORZONE MODULES WILL FIT ON A FLATBED TRUCK?

A rmorZone Moduleshave been specifically designed for easy transport. Twenty-Four Modules, 157' [48 m] can be loaded onto a standard flat bed and deployed in under half an hour by a two man crew.





- 2 FORK LIFT PORTS

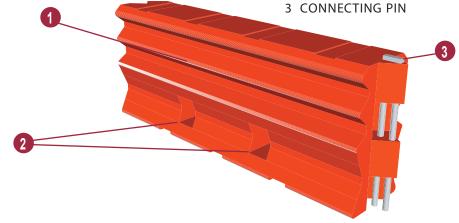

FEATURES

- Connects directly to the Orion Steel Barrier and ABSORB® 350 Crash Cushion
- Only 17" [450 mm] wide; ideal for narrow medians in construction zones
- NCHRP 350 TL-2 accepted
- Heavy machinery is not required to deploy modules

WHERE TO USE

- **Bridge Decks**
- Construction Zones
- Medians
- Side of Road

