

# SafePace® 700 Variable Messaging Sign



Choice of faceplate colors available

The new Traffic Logix® SafePace® 700 variable messaging sign offers variable messaging with extra large 18" LED digits.


The SafePace 700 variable messaging sign allows you to display the message of your choice while displaying vehicle speeds in bright, large digits that can be seen even from a distance. With fully customizable text and graphics, the SafePace 700 is ideal for a variety of road conditions and situations, helping to make your streets safer one sign at a time. Traffic calming, making our streets a safer place for years to come.

## 700 Specifications

Digit Size	18"
Height	42.5"
Weight	55 lbs
24/7, 365 Scheduling	✓
Data Collection	✓
Solar Compatibility	✓
Battery Operated	
Universal Mounting	
Cloud Compatibility	✓
Trailer Compatibility	✓
Dolly Compatibility	
Hitch Compatibility	
Warranty	2 Years

## Features

- MUTCD compliant** full matrix radar sign with two rows of customizable text and 18" digits
- Message displayed can be determined by driver speed
- Allows for **animated text or graphics** such as moving arrows or a scrolling message
- Unique light enhancing, anti glare lens system provides **brilliant visibility** even in poor lighting
- Includes **integrated flashing speed violator strobe** to alert speeding drivers
- Ultra **low power consumption** including the most power-efficient radar technology available and optional solar power
- Superior construction** and durability for long-lasting performance
- High strength aluminum sign face and individual **optical lenses to protect against vandalism or theft**
- Stealth Mode** allows the sign to collect baseline traffic data while speed display appears blank to

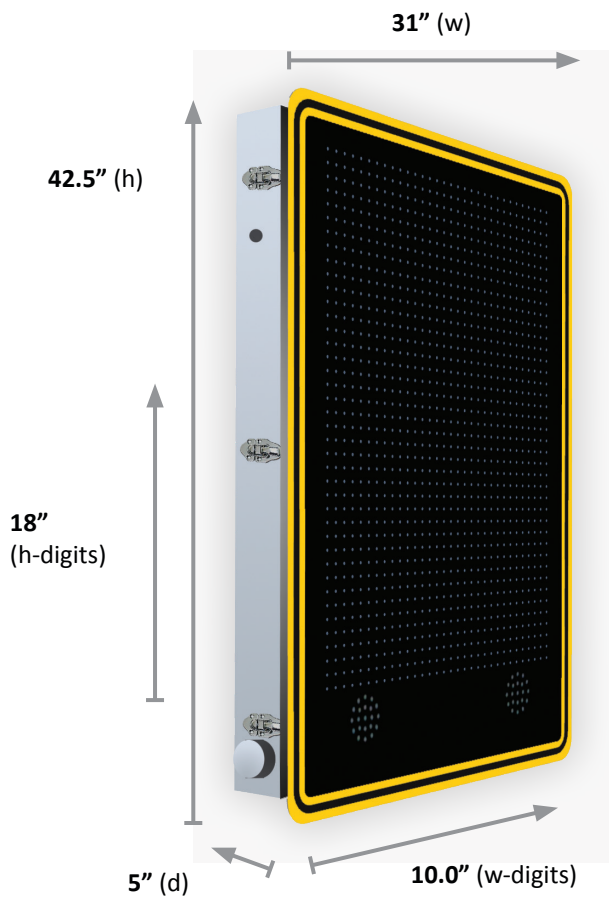

Feature	Specifications
<b>Dimensions</b>	
Digits	18"(h) x 10"(w), 768 LEDs
Variable Message Matrix	12.5"(h) x 24"(w), 512 LEDs 1 graphic or 2 lines of 6.0" (h) text (up to 7 characters per line)
Unit	42.5"(h) x 31.0"(w) x 5.0"(d)
<b>Sign Weight</b>	
Unit alone without batteries	55 lbs
<b>General Specifications</b>	
Operating Temperatures F (C):	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or Kilometers per hour (km/h)
Faceplate	Yellow or white high-Intensity prismatic reflective sheeting on sign face with black colored text MUTCD approved colors and format

Feature	Specifications
Bashplate	Aluminum, 0.1875"
Communications	Bluetooth (standard) GSM/GPRS (optional, for use with SafeFace Cloud)
Programming	SafeFace Pro sign management software SafeFace Cloud remote sign management 24/7 365 day unlimited programming and scheduling
<b>Power Options (Electrical Specifications)</b>	
AC power input	100~240 V AC
DC power input	12 V DC
Solar panel options	140 W
<b>Radar</b>	
Internal	Doppler (FCC approved)
Radar RF out	5 mW maximum
Radar f-center	24.125 GHz +/- 25 MHz
Pickup distance	Up to 1,200 feet
Beam	11° x 11°, Linear polarization
<b>Display</b>	
LEDs	1,322
Digits	768 Amber, 15°, 5 mm, luminous Intensity (5,000 – 12,000 mcd/LED)
Matrix	512 Amber, 15°, 5 mm, luminous Intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strobe	42 White, 15°, 5 mm, luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	1,322
Ambient Light Sensors	2 sensors and automatic brightness control
<b>Enclosure</b>	
Construction	12/14 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant Non-sealed and ventilated
<b>Warranty</b>	
Sign	2 years
Batteries	1 year