

SafePace® 250 Driver Feedback Sign



Choice of faceplate colors available

The Traffic Logix® SafePace® 250 driver feedback sign is a compact speed display sign. With slightly larger digits than the entry level SafePace® 100, but still smaller than the full size 15" digits on larger SafePace® signs, the SafePace 250 offers a versatile solution for those looking for a slightly larger sign.

The compact, portable SafePace 250 can be mounted at multiple locations and offers exception visibility and power efficiency.

250 Specifications

Digit Size	12"
Height	28"
Weight	22 lbs
24/7, 365 Scheduling	✓
Data Collection	✓
Solar Compatibility	✓
Battery Operated	✓
Universal Mounting	✓
Cloud Compatibility	✓
Trailer Compatibility	✓
Dolly Compatibility	✓
Hitch Compatibility	✓
Warranty	2 Years

Features

Enlarged Sign Digits: The bestselling, compact SafePace sign, now available with slightly larger digits for improved visibility.

Energy Efficient: The SafePace 250 can function for up to 3 weeks autonomously with optional battery power depending on traffic volume.


Optimal Visibility: Unique light enhancing, anti-glare lens system, as well as automatic ambient light adjustment provide brilliant visibility even in poor lighting conditions.

User Friendly: Software interface is user friendly and can be programmed to set sign parameters quickly and easily. Optional data collection allows you to download traffic data and generate statistical reports from anywhere with SafePace Cloud.

Stealth Mode: Baseline traffic data can be collected for comparison and analysis while speed display appears blank to motorists.

Speed Violator Strobe: Programmable flashing strobe alerts drivers to slow down when they exceed the threshold speed you choose.

Universal Mounting: Optional mounting brackets let you use one sign at multiple locations with the turn of a key.

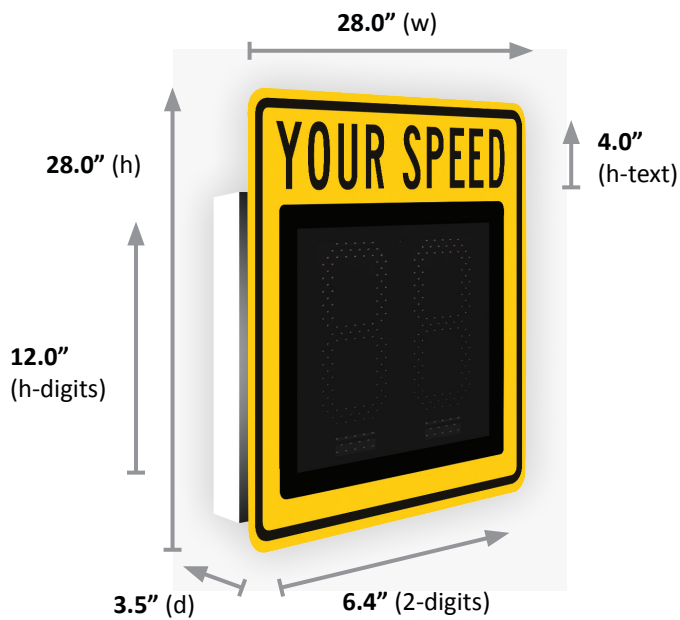

Feature	Specifications
Dimensions	
Digits	12"(h) x 6.4"(w), 112 LEDs per digit
Text	Letters 4.0" (h) spell "YOUR SPEED" fixed message, 1 line
Unit alone	21.5"(h) x 26"(w) x 3.5"(d)
Unit with "YOUR SPEED" sign mounted	Full size sign: 28.0"(h) x 28.0"(w) x 3.5"(d)
Sign Weight (unit alone, without "YOUR SPEED" sign)	
AC Powered	18 lbs
4 cell battery powered model	22 lbs
Solar powered model	20 lbs (not including solar panel or bracket)
General Specifications	
Operating Temperatures F (C):	-40° (-40°) to 185° (85°)
Speed Units	Miles per hour (mph) or Kilometers per hour(km/h)
Faceplate	Yellow or white high-Intensity prismatic reflective sheeting on sign face with black colored text MUTCD approved colors and format

Feature	Specifications
Bashplate	Aluminum, 0.25"
Communications	Bluetooth (standard) GSM/GPRS (optional, for use with SafeSpace Cloud)
Programming	SafeSpace Pro sign management software SafeSpace Cloud remote sign management 24/7 365 day unlimited programming and scheduling
Power Options (Electrical Specifications)	
AC power input	100~240 V AC
DC power input	12 V DC
Solar panel options	50W, 90W
Radar	
Internal	Doppler (FCC approved)
Radar RF out	5 mW maximum
Radar f-center	24.125 GHz +/- 25 MHz
Pickup distance	Up to 1,200 feet
Beam	11° x 11°, Linear polarization
Display	
LEDs	252
Digits	224 Amber, 23°, 5 mm, luminous Intensity (5,000 – 12,000 mcd/LED)
Speed Violator Strokes	28 White, 15°, 5 mm , luminous intensity (18,000 – 28,000 mcd/LED)
Optical Lenses	252
Ambient light sensors	1 sensor and automatic brightness control
Enclosure	
Construction	12 gauge aluminum, flat black powder coated front for reduced glare and maximum contrast; light gray powder coated body to minimize heat absorption
Weatherproof Rating	Weatherproof, NEMA 4X-12, IP65 level compliant Non-sealed and ventilated
Warranty	
Sign	2 years
Batteries	1 year